



AF250 LED Pole Light

The AF250 features WATT for WATT the highest foot-candles of light available in the industry. Compare the AF250 to 1,000 WATTS of metal halide.



AF250	
	100V - 277V (480 optional)
	240 WATTS
	30,300 LM 126 LM/W
	5,000 - 5,500K CCT 70 - 91+CRI
	23" x 12" x 3"
	L70 100,000+ HOURS L90 65,000
	Gray, White, Black, or Dark Bronze
	20 Lbs 9.6 KG
	Five Year Warranty Ten Year Optional



LED to Metal Halide,
5 to 1 Ratio in Watt
to Watt Savings



Amerlight's
LED Brightest
in the Industry



Wireless
Controls
Available

Designed and Assembled in the USA




AMERLIGHT

Advanced LED Technology

amerlight.com

AF250-062117

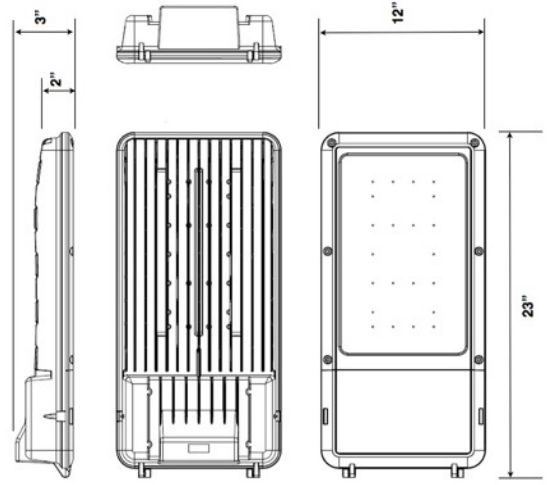

MORE LIGHT

LESS ENERGY

LOWER COST



1 5/8" - 2 3/8" to Pole
Mounting Diameter

360 degree rotation

Adjustable knuckle rotate
180 degrees



Installation

INSTALLATION — Die-cast aluminum arm with integral splice compartment. Standard arm is 4" in length. Aluminum fitter for 4" to 6" OD poles. 2.5 inch mounting diameter size with 2 hex head set bolts. Mounting knuckle rotate/tilts 180 degrees.

ELECTRIC - 14 AWG stranded wire with wire caps

CONSTRUCTION — Heavy gauge die-cast aluminum housing. Integral structural support plate for mounting arm and electrical components ensures rigidity and strength. Hinged aluminum door frame incorporates stainless steel hardware. Continuous silicone gasket surrounds lens for weather-tight seal. Lens: Thermal shock resistant tempered glass lens. Standard fixture colors; Dark Bronze, White, Light Gray. High gloss plastic coated. Custom colors available on special order.