




LN20 - LN65 Linear Tri-Proof LED Light

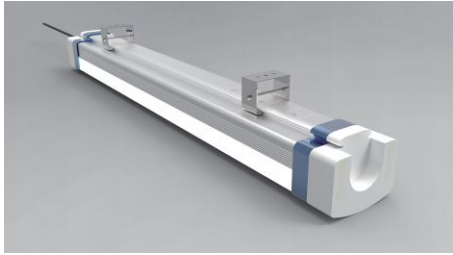

The LN Tri-Proof Series features a high, lightweight with versatile mounting options and aluminum alloy. Use knockouts or daisy chained waterproof connectors. Mounting brackets to adapt to any requirement. Wireless and power-line controls, proximity sensors can be factory installed.

	LN20, 30, 40, 50, 65	
	100V - 277V (480 optional)	
	20 - 65 WATTS	
	2800 - 9620 LM 148 L/W	
	4,000 - 5000K CCT	80+ CRI
	Suitable for wet locations IP66	
	60,000 HOURS	
	Aluminum alloy	
	Five Year Warranty	



80 CRI
True Color
Technology




Amerlight's
LED Brightest
in the Industry




Wireless
Controls
Available

Designed and Assembled in the USA



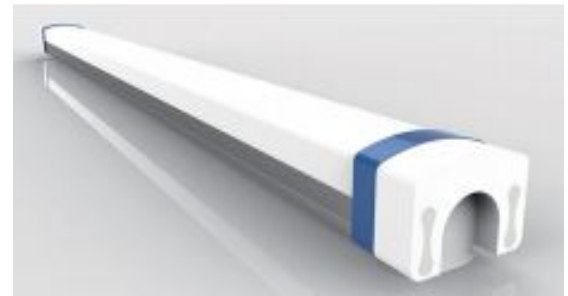

3. Product Dimension

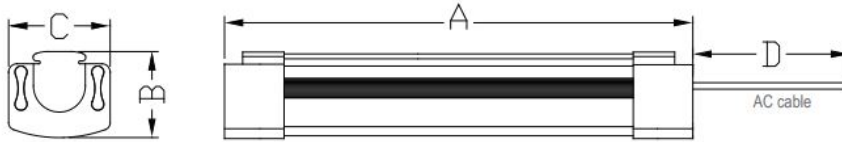

Model NO.	Size A(mm)	Size B(mm)	Size C(mm)	Size D(mm)
L010600-20CO-XA	600	71	84	800
L010900-30CO-XA	900	71	84	800
L011200-40CO-XA	1200	71	84	800
L011500-50CO-XA	1500	71	84	800
L011500-65CO-XA	1500	71	84	800

MORE LIGHT LESS ENERGY LOWER COST



Installation

1. Use a qualified electrical contractor and follow all applicable electrical codes.
2. Attach brackets to the wall, frame or other secure mounting location.
3. Properly secure the fasteners.
4. Please insure that mounting meets all local seismic applicable codes.