



Description

The LN200 is the highest performance LED troffer available in the industry today for 30ft - 40ft ceilings. This product is designed for indoor applications. Compare the LN200 to 270 Watts fluorescent T5 and 750 Watts metal halide.




Certification

UL / DLC



Specifications

Part No.:	LN200
Wattage:	200 W
Lumens per Watt:	150 LM/W
Lumens:	30,000 LM
Input Voltage:	100V-277 V
Power Factor:	0.92
CCT:	5000K
CRI:	80+
IP Rating:	IP20
Dimensions:	22" x 15" x 2.3"
Weight:	10.5 Lbs 4.8 KG
Lifespan:	55,000 L70 Hours
Dimmable:	Optional
Warranty:	5 Year Warranty
Accessory:	Occupancy Sensors Optional with Bi level Dimming Aircraft Hanger Wire and Mounting Clips Included

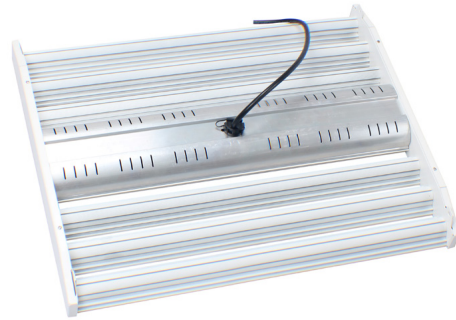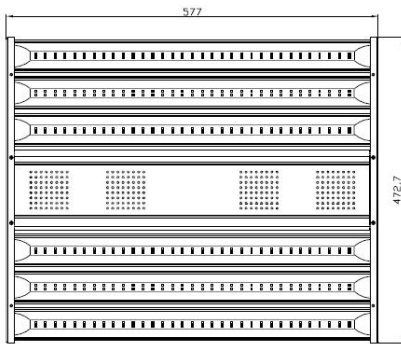

Optional EMR Battery Backup

Optional EMR Battery Backup upon request.



Optional RELOC® Modular Wiring Solutions

Optional RELOC® wiring solutions for easy installation upon request.

Installation

1. Use a qualified electrical contractor and follow all applicable electrical codes.
2. Attach aircraft hanger wire to the joist or other secure mounting location.
3. Adjust length of wire to achieve the required height and angle from the floor.
4. Properly secure the wire.
5. Please insure that hanger wire meets all local seismic applicable codes.

Designed and Assembled in the USA

